


Schack valves for turning of grab

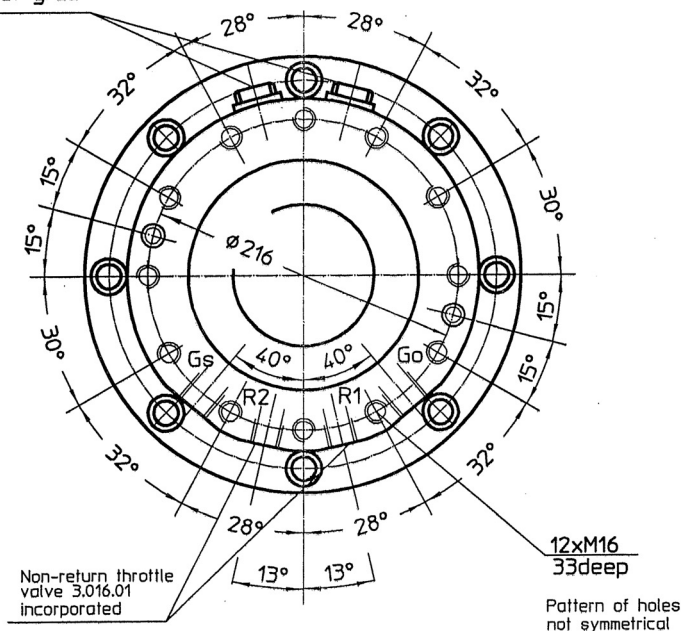

This invalidates any former dimensioned sheets

Variants of design:

Stator with scew thread 12xM16 ϕ 216
 Pattern of holes not symmetrical
 Fitting dimensions same as:
 707HC-1-G3/4"

Machine:

e.g.hydraulic excavator service weight:
 max. 16ts. with floating attachment
 max. 10,5ts. with rigid attachment

Add-on units:

Clamshell buckets of max. 1,0m³
 Grapples of max. 0,5m³
 Grabs for demolition and sorting
 of max. 0,6ts. dead load
 Sorting units (please ask manufacturer)

Technical details:





max. thrust load	= 90KN
max. radial load	= 70KN
Pmax. grab	= 350bar
Pmax. rotating engine	= 250bar
Torque/100bar	= 1200Nm
Absorption volume	= 940cm ³ /R
min. oil passage Gs/Go	= NW14
Mass	= 75kg
max. rotations	= 30rpm

max.transverse moment: refer to 4.609.00

Volume of delivery:

2 sealing ring nr.	116
4 Connex pin	SG 16x30

Connections:

R1,R2: turn rotator		G 1/2"
Go: open grab		G 3/4"
Gs: close grab		G 3/4"
L: Measuring conn.		G 1/4"

Edition **0310** Th.

Paint: black primary coat
 Reserve made to modifications
 All rights reserved